


RVL

Carriage plate scale for counterbalanced trucks

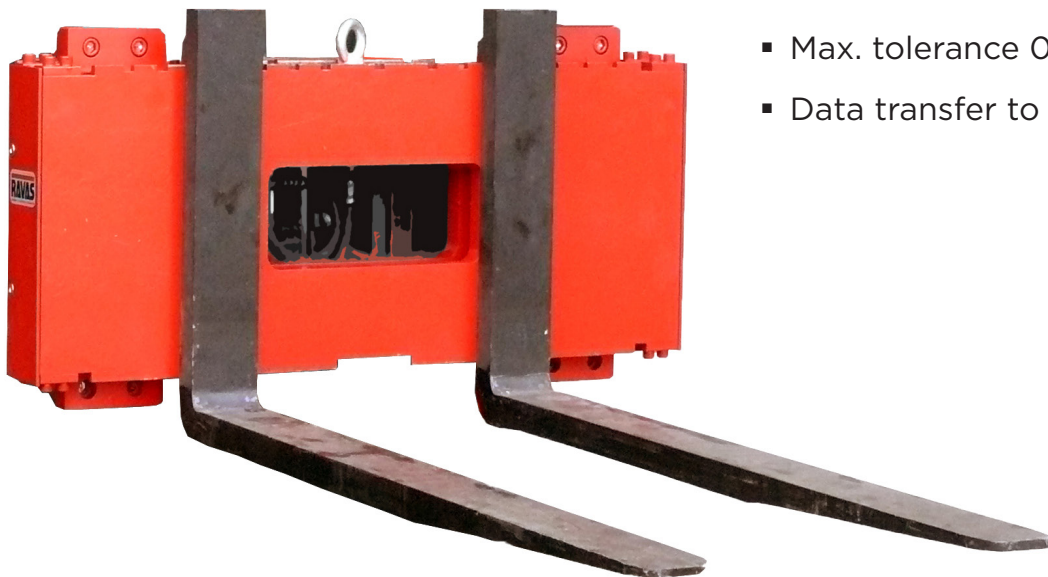

BENEFITS

- For use with rotators and clamps
- Max. tolerance 0.2% of the load lifted
- Data transfer to WMS or ERP systems

Top quality
For industrial use



RAVAS PERFORMANCE LINE

RAVAS

FUNCTIONS

- Functions of 2100, 4100 or 6100 weight indicator
- See indicator specification sheet


The RAVAS indicators have been developed exclusively for mobile applications. They are robust and resistant to shocks and vibrations. RAVAS indicators are compact and have a low power consumption. All indicators are dust and waterproof, according to norm IP65. RAVAS mobile scales can be used outdoors.

STANDARD SPECIFICATIONS

- Capacity 2,500, 5,000 or 7,000 kg
- Graduation 2 kg at 2,500 kg capacity
5 kg at 5,000 kg capacity
10 kg at 7,000 kg capacity
- System tolerance 0.2% of the load lifted
- Overload protection 200%
- Protection class IP65 / NEMA 4
- Cabling via spiral cable
- Power supply from truck battery, via regulator



DIMENSIONS IN MM

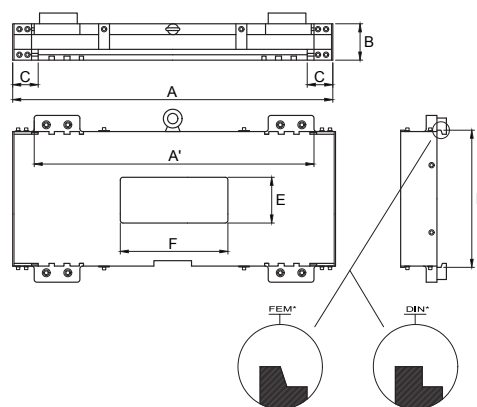

	2500 kg FEM2	5000 kg FEM3	7000 kg FEM4
A	1050	1120	1400
A1	900	940	1160
B	110	135	160
C	65	80	110
D	407	508	635
E	120	170	210
F	1.3 A 225 kg	1.3 A 450 kg	1.3 A 650 kg

Tolerances +/- 2 mm



- ISO 9001
- ISO 14001

OPTIONS*

- Thermal or matrix printer
- UniMobile/UniWin software for data capture & transfer
- Cabling over rolls, integrated in the mast
- Wireless connection between RVL and indicator in cabin
- Smaller display graduations
- Different width
- Converter 80/48/36/24Vdc - 12Vdc
- Explosion proof version for use in hazardous areas, zone I; ATEX certified

RAVAS Europe B.V.

P.O. Box 2023, NL-5300 CA Zaltbommel, The Netherlands
T. +31 (0)418 51 52 20, F. +31 (0)418 51 53 20
backoffice@ravas.com, www.ravas.com

* The use of options may change related specifications. rev.20160325 Changes reserved

RAVAS